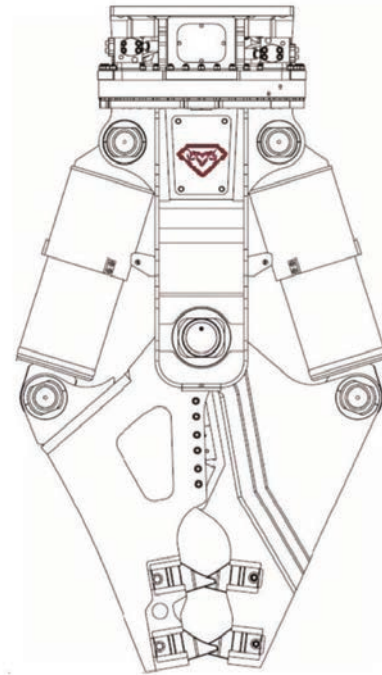
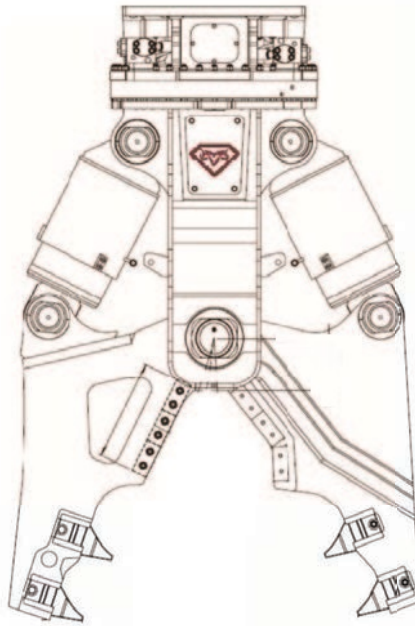
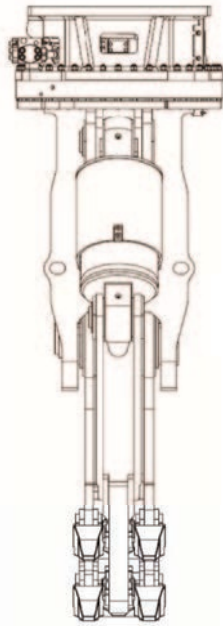













PRODUCT INFORMATION PRODUKTINFORMATIONEN



			HCS-12U	HCS-19U	HCS-128U	HCS-35U	HCS-48U	HCS-65U
 (1)	Baggerklasse/Excavatorclass	T.	10-16	17-25	24-37	32-64	42-62	52-86
 **	Gewicht / Weight	Kg.	980	1980	2960	3540	4820	6230
	Jaw opening / Maulweite	mm.	670	760	890	1050	1360	1430
	Jaw depth / Maultiefe	mm.	340	625	745	785	1100	1170
	Blade length / Messerlänge	mm.	140	350	350	525	525	525
	Cutting force / Schneidkraft	T.	208	240	385	530	640	1025
	Crushing force / Brechkraft	T.	58	62	98	116	162	186
 	Arbeitsdruck Bagger / Workingpressure excavator	Bar	350	350	350	350	350	350
 	Ölvolumenstrom / Oilflow	L/min.	90-180	150-250	150-250	230-360	350-450	450-550
	Open/close (sec.) Öffnen/Schließen (sek.)	Sec.	3.5/3.1	1.5/1.6	2.7/3.0	2.9/3.7	3.1/3.5	3.8/4.1
 	Arbeitsdruck beim rotieren / Workingpressure rotation	Bar	140	140	140	140	140	140
 	Ölvolumenstrom beim rotieren / Oilflow rotation	L/min.	25	30	30	50	50	50