

HYDRA RAM[®]

DEMOLITION & RECYCLING EQUIPMENT



HCC SERIES



HARDOX
IN MY BODY

Speed
Valve

INTERCHANGEABLE
TOOTH SYSTEM


14 MODELS CONCRETE PROCESSORS FROM 180 UP TO 12.000 KGS
FOR EXCAVATORS FROM 2 ~ 150 TONS



HYDRA RAM®

DEMOLITION & RECYCLING EQUIPMENT

HCC SERIES

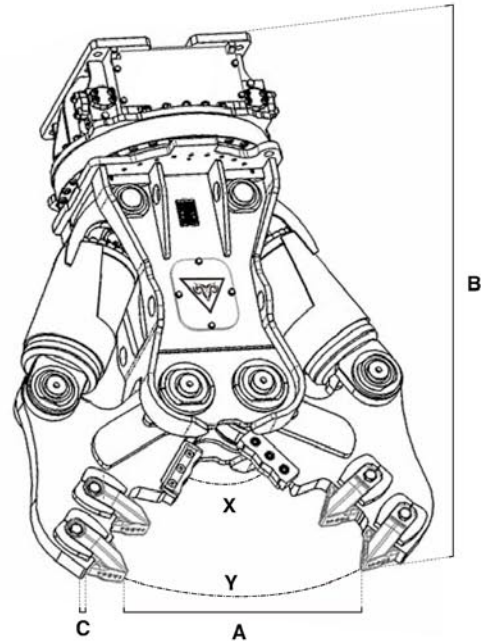

		HCC-2	HCC-3V	HCC-5V*	HCC-10V*	HCC-13V*	HCC-17V*	HCC-22V*	HCC-27V*	HCC-40V	HCC-50	HCC-65V	HCC-85V	HCC-100V	HCC-120V
⁽¹⁾	t.	2 : 4	4 : 7	5 : 9	10 : 15	20 : 25	16 : 21	22 : 28	29 : 35	36 : 49	50 : 65	66 : 85	86 : 105	86 : 130	86 : 150
**	kg.	180	350	550	1020	1320	1680	2130	2640	3820	4850	6430	8550	10750	12200
A	mm.	280	358	480	685	610	820	890	1090	1370	1500	1680	1830	2050	2305
B	mm.	1020	1165	1300	1550	1750	1775	1900	2115	2520	2690	2950	3160	3350	3700
C	mm.	25	35	50	60	60	70	70	80	90	100	100	120	120	130
	mm.	90	140	140	140	180	180	180	220	260	325	325	325	400	400
X	t.	60	80	90	160	180	170	205	220	365	470	590	720	760	820
Y	t.	18	22	25	45	45	60	70	75	85	120	145	185	220	240
	t.	20	30	40	80	60	100	115	125	155	215	260	335	395	395
	bar	210	210	250	310	310	310	310	310	310	340	340	340	340	340
	l/min.	40 / 60	60 / 80	80 / 150	150 / 250	180 / 250	180 / 250	200 / 300	250 / 350	300 / 400	350 / 450	400 / 500	450 / 650	500 / 800	500 / 800
	bar	/	120	120	140	140	140	140	140	140	140	140	140	140	140
	l/min.	/	5	10	10	10	10	10	10	10	30	30	50	50	50
	open/close (sec)	1,1/1,3	1,2/1,2	0,8/1,4	0,9/1,7	0,9/1,6	1,7/3,3	1,8/3,4	2,0/2,6	3,5/3,1	3,6/3,9	3,8/4,1	3,8/3,9	3,7/4,0	3,7/4,1

(*) Equipped with exchangeable teeth
 (**) The above mentioned weight is without connection plate
 (1) Recommended excavator / attachment combination

(DEALER)



HYDRA RAM®
 DEMOLITION & RECYCLING EQUIPMENT

HYDRARAM b.v.
 Meander 7
 NL 9231DB SURHUISTERVEEN
 The Netherlands

tel. +31 512-365981
 fax. +31 512-365761
 www.hydraram.com
 info@hydraram.com