

# HYDRA RAM<sup>®</sup>

DEMOLITION & RECYCLING EQUIPMENT



HFP SERIES

**HARDOX**  
IN MY BODY

**Speed  
Valve**

INTERCHANGEABLE  
TOOTH SYSTEM


7 MODELS FIXED PULVERIZERS FROM 550 UP TO 6500 KGS  
FOR EXCAVATORS FROM 6 ~ 85 TONS







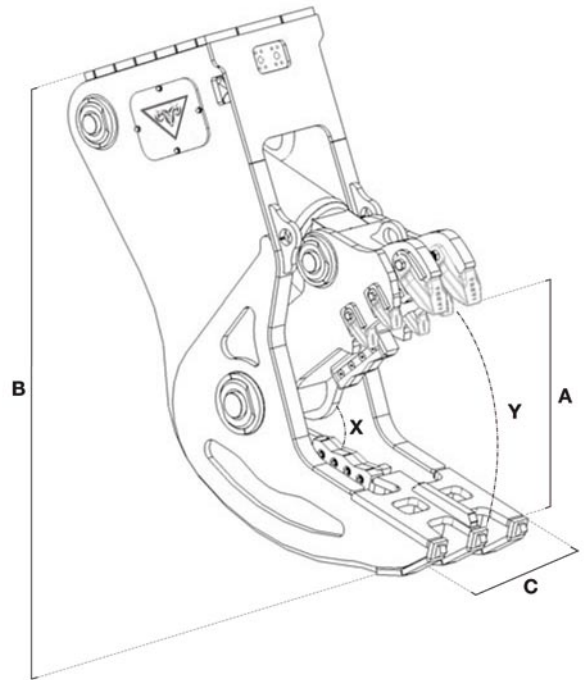


# HYDRA RAM®

DEMOLITION & RECYCLING EQUIPMENT

## HFP SERIES



		HFP-5V	HFP-12V	HFP-20V	HFP-25V	HFP-32V	HFP-42V	HFP-65V
 (1)	t.	6 : 10	13 : 17	18 : 25	25 : 32	33 : 45	42 : 68	65 : 85
 *	kg.	550	1190	1910	2490	3070	4120	6430
A	mm.	475	690	810	870	950	1100	1250
B	mm.	1330	1740	1850	1955	2100	2400	2670
C	mm.	330	420	470	570	650	740	800
	mm.	140	220	260	260	260	300	325
X	t.	70	150	200	235	275	370	415
Y	t.	25	65	80	95	105	140	170
	t.	45	100	125	155	170	220	280
	bar	250	310	310	310	310	340	340
	l/min.	40 / 60	120 / 200	200 / 300	250 / 350	300 / 400	350 / 500	450 / 600
 open/close	sec.	3,4/5,3	2,0/2,6	2,0/2,7	3,0/3,2	2,8/2,7	2,6/2,9	3,0/3,7

(\*) The above mentioned weight is without connection plate  
 (1) Recommended excavator / attachment combination

(DEALER)



**HYDRA  RAM®**  
 DEMOLITION & RECYCLING EQUIPMENT

**HYDRARAM b.v.**  
 Meander 7  
 NL 9231DB SURHUISTERVEEN  
 The Netherlands

tel. +31 512-365981  
 fax. +31 512-365761  
[www.hydraram.com](http://www.hydraram.com)  
[info@hydraram.com](mailto:info@hydraram.com)

\*SPECIFICATIONS IN THIS BROCHURE ARE SUBJECT TO CHANGE WITHOUT NOTICE